




# COAXIAL WATER LOADS FOR UHF CL SERIES

DATA  
SHEET  
No. T89A

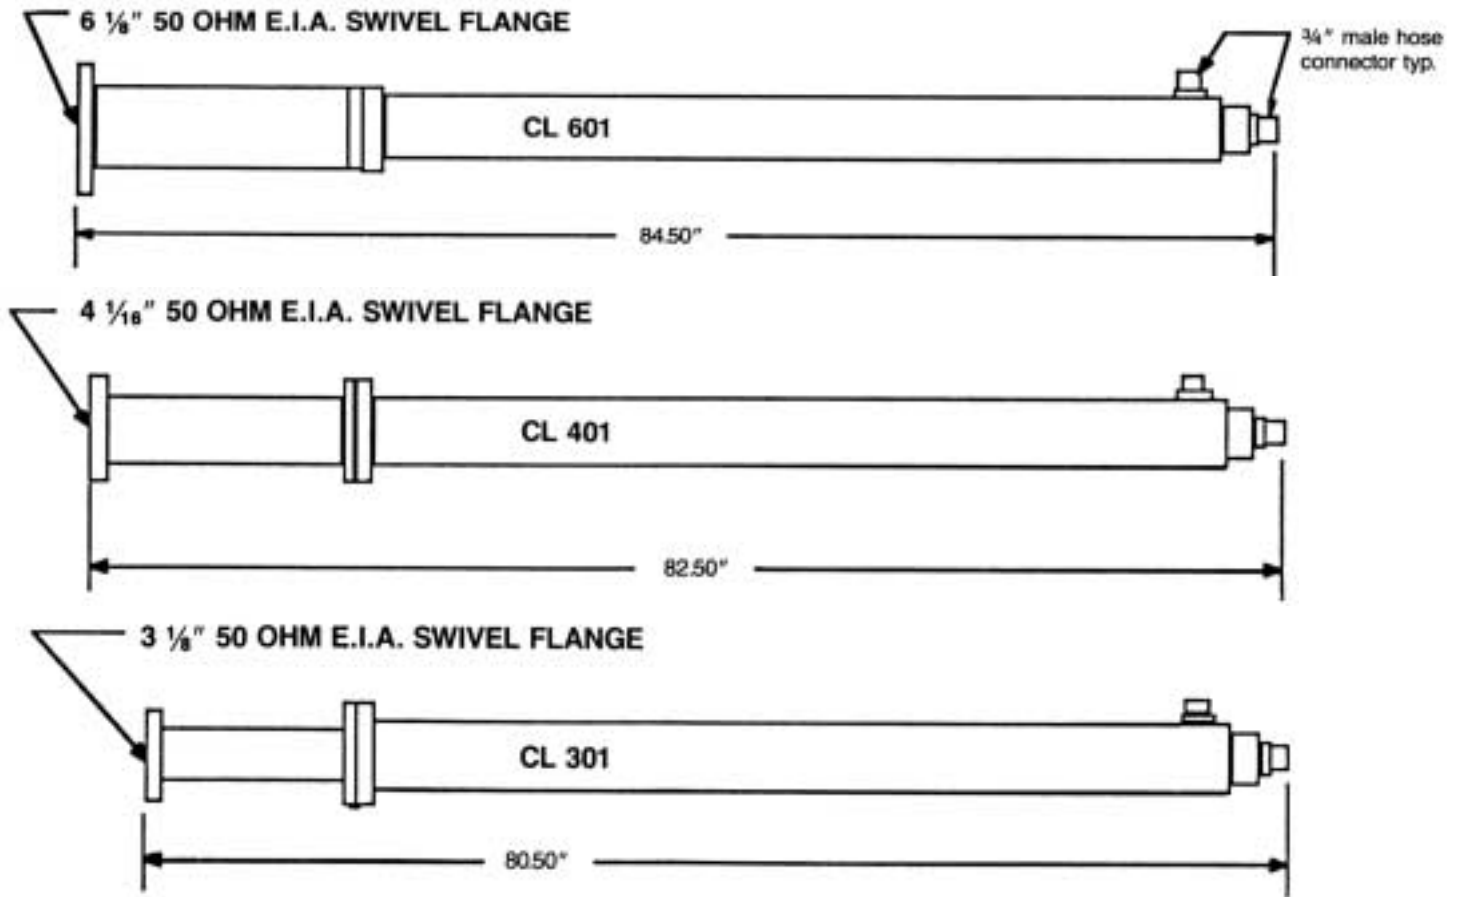

## SPECIFICATIONS:

	CL 301	CL 401	CL 601
POWER HANDLING (CW)	50 KW	80 KW	100 KW
VSWR (MAX)	1.05:1 OVER ANY 6 MHz BAND 1.20:1 470-820 MHz		
INPUT CONNECTION (FEMALE)	3 1/8"	4 1/16"	6 1/8"
FLOW RATE (MIN.)	6 GPM	9 GPM	12 GPM
SIZE	SEE OUTLINE DRAWING		
COOLANT CONNECTIONS (MALE)	3/4" NPT OR 3/4" NGH		
COOLANT PRESSURE (MAX.)	80 PSIG		
COOLANT	20%-50% SOL. OF ETHYLENE GLYCOL & WATER		

Data subject to change without notice



MICROWAVE ENGINEERING CORPORATION  
1551 OSGOOD STREET, NORTH ANDOVER, MA 01845 • TEL (978) 685-2776 • FAX (978) 975-4363

Website: [www.microwaveeng.com](http://www.microwaveeng.com), Email: [sales@microwaveeng.com](mailto:sales@microwaveeng.com)