

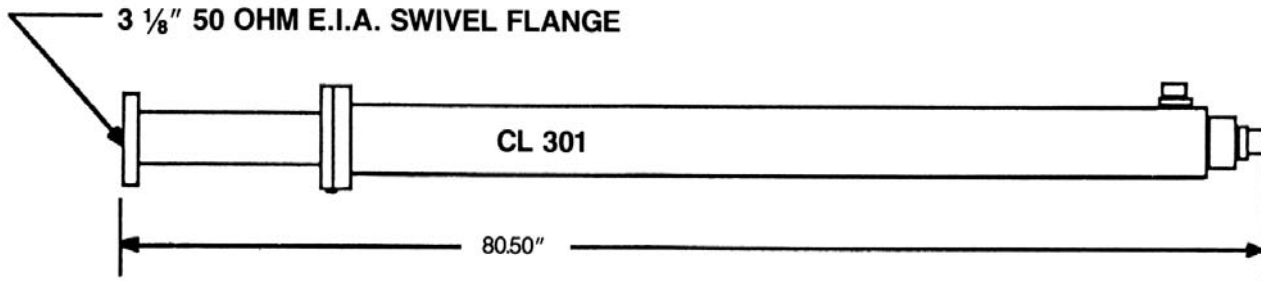


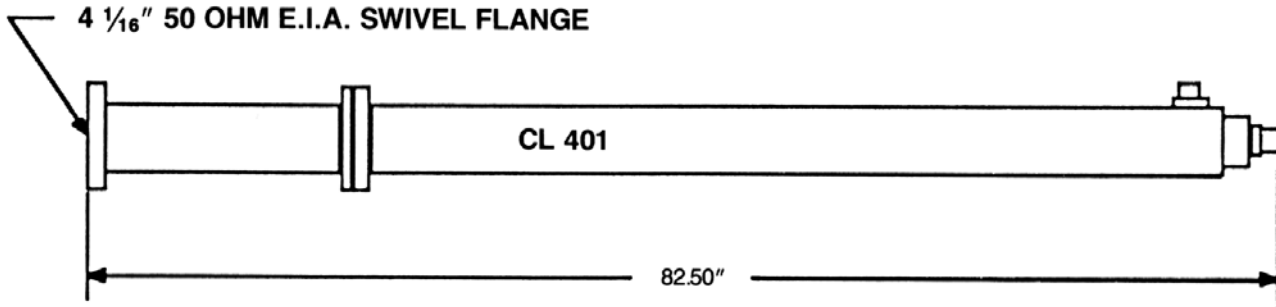

# COAXIAL WATER LOADS FOR UHF CL SERIES

DATA SHEET  
No. T89A

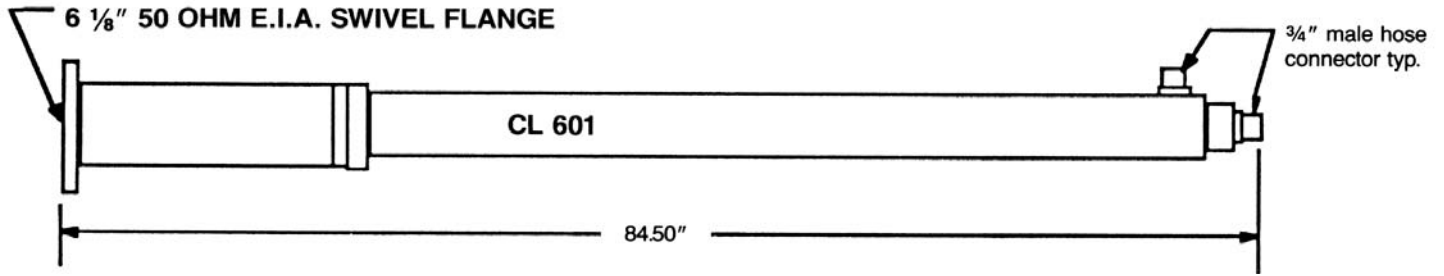

## SPECIFICATIONS:

	CL 301	CL 401	CL 601
<b>POWER HANDLING (CW)</b>	50 KW	80 KW	100 KW
<b>VSWR (MAX)</b>	1.05:1 OVER ANY 6 MHz BAND 1.20:1 470-820 MHz		
<b>INPUT CONNECTION (FEMALE)</b>	3 1/8"	4 1/16"	6 1/8 "
<b>FLOW RATE (MIN.)</b>	6 GPM	9 GPM	12 GPM
<b>SIZE</b>	SEE OUTLINE DRAWING		
<b>COOLANT CONNECTIONS (MALE)</b>	3/4" NPT OR 3/4" NGH		
<b>COOLANT PRESSURE (MAX.)</b>	80 PSIG		
<b>COOLANT</b>	20%-50% SOL. OF ETHELYNE GLYCOL & WATER		

